


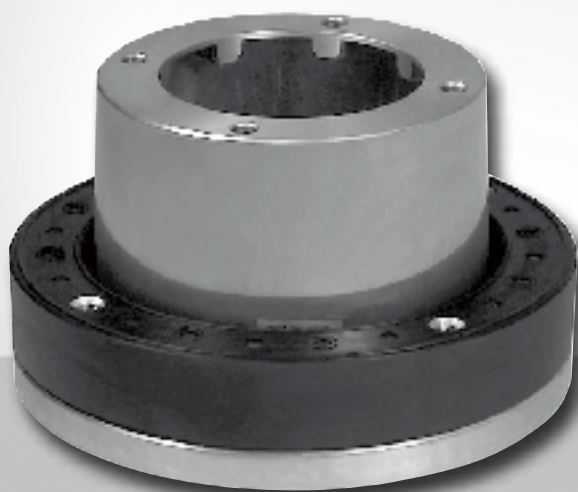

减振环

Damping rings

- 垂直 / 水平安装
- 橡胶柔性隔离 - 低成本降噪
- NBR 橡胶防矿物油腐蚀
- 成型环具有密封功能, 无需额外密封

- *Vertical and horizontal mounting*
- *Low cost noise level reducing as a result of rubber flexible separation*
- *Resistance against mineral-oil due to NBR-rubber*
- *Moulded ring-sealing, no additional sealing required*

型号

Model type

DR - V1 / B5 - 300 / VS


标准型 Standard version	200	VS型 VS-Version
	250	
	300	
	350	
	400	
	450	
	550	
	660	

设计
Design

-	标准型 Standard version
VS	VS型 VS-Version


尺寸

Dimensions

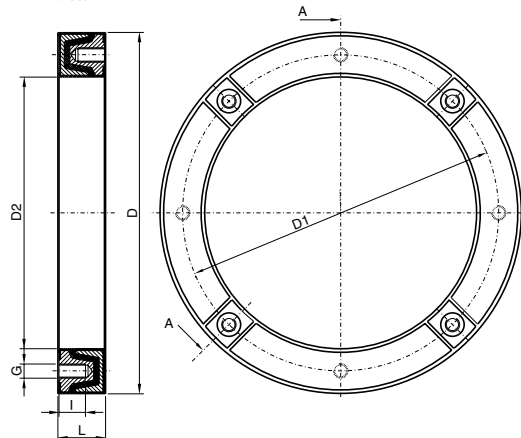详细A-A
Detail A - A

DR.../VS 设计带有通孔便于垂直安装

Design DR.../VS with counterbore holes for easy vertically IM V1 mounting

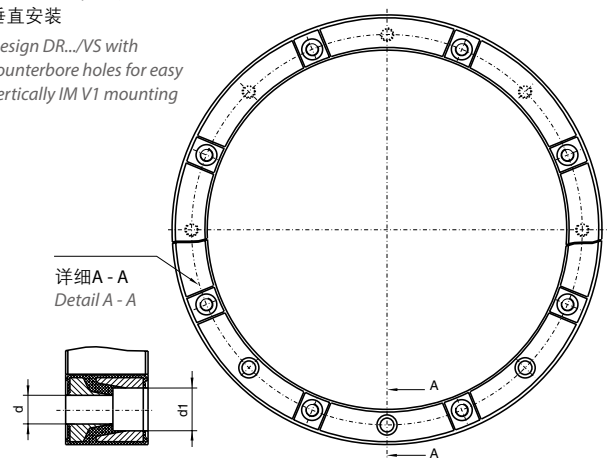


减振环

Damping rings

减振环型号 Type of damping ring	IEC电机机座规格 IEC-Motor frame size	尺寸[mm] Dimensions [mm]							
		D	D1	D2	G	I	L	d	d1
DR-V1/B5-200	80 / 90S / 90L	200	165	146	4 x M10	18	40	-	-
DR-V1/B5-250	100L / 112M	250	215	191	4 x M12	22	45	-	-
DR-V1/B5-300	132S / 132M	300	265	235	4 x M12	22	50	-	-
DR-V1/B5-350	160M / 160L / 180M / 180L	350	300	261	4 x M16	22	60	-	-
DR-V1/B5-400	200L	400	350	301	4 x M16	29	50	-	-
DR-V1/B5-450	225S / 225M	450	400	352	8 x M16	32	60	-	-
DR-V1/B5-550	250M / 280S / 280M	550	500	452	8 x M16	32	60	-	-
DR-V1/B5-660	315S / 315M	660	600	552	8 x M20	33	65	-	-
DR-V1/B5-300/VS	132S / 132M	300	265	235	4 x M12	22	50	4 x 14	4 x 20
DR-V1/B5-350/VS	160M / 160L / 180M / 180L	350	300	261	4 x M16	22	60	4 x 18	4 x 26
DR-V1/B5-400/VS	200L	400	350	301	4 x M16	29	50	4 x 18	4 x 26
DR-V1/B5-450/VS	225S / 225M	450	400	352	8 x M16	32	60	8 x 18	8 x 26
DR-V1/B5-550/VS	250M / 280S / 280M	550	500	452	8 x M16	32	60	8 x 18	8 x 26
DR-V1/B5-660/VS	315S / 315M	660	600	552	8 x M20	32	65	8 x 22	8 x 26

工作温度为 +60 °C 时，允许的径向重量和弯曲载荷。

Permissible radial weight and bending loads with an operating temperature of +60 °C



$$F_{zul} \geq F_{\text{泵Pumpe}} + F_{\text{电机Motor}}$$

$$Mb_{zul} \geq F_{\text{电机Motor}} \times L1 - F_{\text{泵Pumpe}} \times L2$$

DR型号 DR-Type	200	250	300	350	400	450	550	660
F_{zul} [N]	385	755	1520	3780	5040	6800	13390	24720
Mb_{zul} [Nm]	30	65	175	740	1100	1600	4400	9000